


Safety Shower

MODEL **6250 GI**

DESCRIPTION	Emergency GI Safety Shower cum Eye Wash fountain hand/foot operated. Model-6250 GI.
DETAIL COMPONENT SPECIFICATION	
1. SHOWER HEAD	Made of highly visible yellow ABS plastic. Shower head is between 82" to 96" above floor surface. (Size-265 mm)
2. PULL ROD	For supply and control of water flow in shower head. Pull rod is within 69" height above floor surface. (Size-737 mm)
3. SHOWER VALVE	Through passage valve that opens automatically when the lever is pushed or pulled. The valve stays open until it is manually closed.
4. EYE WASH HEAD	Two high-flow sprays, operated at low pressure, which washes the eye and face. Anti-dust cover protects the head from airborne contaminants and automatically opens with the water pressure. (Distance between two eye wash head-165 mm).
5. EYE WASH BOWL	Highly visible yellow ABS plastic resistant to damage from most acid, alkali and oil. (Size-298mm)
6. PUSH TO OPEN VALVE	Its connect unit to uninterruptible water supply of 3 gallons.
7. FOOT PEDAL	For supply and control of water flow in the eye wash head.
8. BASE PLATE	To hold the shower structure in a stable position. (Size-180mm).

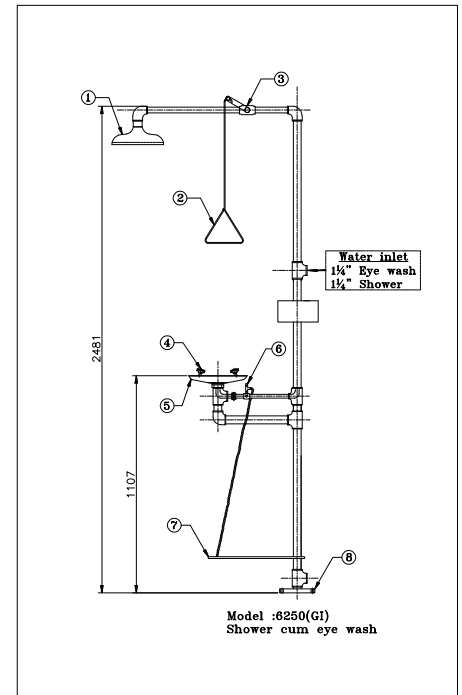

WATER INLET CONNECTION	1 1/4" Eye wash 1 1/4" Shower	
WATER OUTLET CONNECTION	1 1/4" Tee.	
SUPPLY WATER CONDITION	Supply Water	Drinking Water
	Operating Press.	2.81 Kgf/cm ² (40 PSI)
	Operating Temp.	Ambient
MATERIAL	1) Pipe	GI
	2) Fitting	GI
	3) Flange	Cast Iron
WEIGHT	18.04 Kg.	
FLOW	110 LPM	
APPROVAL	IS : 10592:1982	

NOTE: All dimensions are in millimeters. Qty/flow of water delivered from eyewash & shower shall be as per IS: 10592:1982

Udyogi Plastics Pvt. Ltd.

294, B. B. Ganguly Street, 2nd Floor, Kolkata - 700 012
 Tel. : +91 33 2225 1470/71/72 ▶ Fax : +91 33 2225 1486
 E-mail : corp@udyogi.net ▶ Website : www.udyogisafety.com

▶ mumbai@udyogi.net ▶ delhi@udyogi.net
 ▶ chennai@udyogi.net ▶ orissa@udyogi.net
 ▶ abd@udyogi.net ▶ noida@udyogi.net