

KUBE

## RUGBY S3

### KU025N

CE UNI EN ISO 20345:2012 S3 SRC ESD CLASS 3

Low shoe, Nubuck IDROTECH® WRU grain leather thickness 1,8-2,0 mm.  
Perspiring and resistant to abrasion fabric lining.  
Shoe with refracting fabric insert.  
Soft, lined and padded tongue.

**COMPLETELY METAL FREE SHOE**

**TOECAP 200J** polymeric **composite non-thermic** according to EN 12568

**MIDSOLE flexible antiperforation composite fabric** according to EN 12568

**SOLE KUBE** bidensity polyurethane antistatic, resistant to hydrolysis ISO 5423:92, to hydrocarbons and to abrasion, anti-shock and anti-slipping **SRC**

**INSOLE 5000, three-materials extracomfort:** perspiring, removable, anatomic, absorbing, ESD and anti-bacterial

The shoe satisfies the requirement according to the norm IEC 61340-4-3:2001 for the electrical resistance

**ESD class 3 (electric dissipative footwear)**


**Size 36-47 Shoe weight Sz 42 gr. 530**




#### MATERIALS



#### TECHNOLOGIES



#### SECTORS

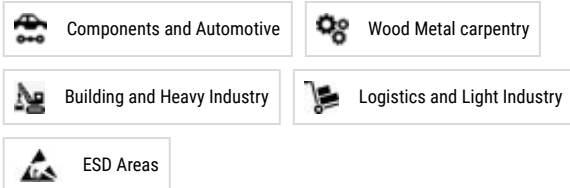

#### SOLE



In order to avoid the high number of accidents caused by slipping danger, Giasco realized an **excellent anti-slipping product**.

This sole is called **Kube**, a young and sporty styled shoe equipped with a special gripping compound and specific cubic dowels with inverted profile in the outsole.

With thanks to these special characteristics Kube obtained the maximum certification against slipping: **jobs on inclined roofs** (UNI 11583:2015).

#### PLUS

## ANTISLIPPING TEST RESULTS

---



**SRC**  
ANTI-SLIPPING SOLE

VERY GOOD

**SRA**  
ceramic +  
NaLS

HEEL  $\geq$  0,28  
FLAT  $\geq$  0,32

**0,46**  
**0,43**

**SRB**  
steel +  
glycerol

HEEL  $\geq$  0,13  
FLAT  $\geq$  0,18

**0,30**  
**0,29**