

KUBE

GOLF S3 KU142E

CE UNI EN ISO 20345:2012 S3 SRC ESD CLASS 3

Low shoe, WRU anti-scratch back leather thickness 1,8-2,0 mm.
Highly perspiring and abrasion resistant fabric lining.
Reinforced heel area STABILITY SUPPORT in PU.
Soft, lined and padded tongue.

COMPLETELY METAL FREE SHOE

TOECAP 200J polymeric **composite non-thermic** according to EN 12568

MIDSOLE flexible antiperforation composite fabric according to EN 12568

SOLE KUBE bidensity polyurethane antistatic, resistant to hydrolysis ISO 5423:92, to hydrocarbons and to abrasion,

anti-shock and anti-slipping **SRC**

INSOLE 5000, three-materials extracomfort: perspiring, removable, anatomic, absorbing, ESD and anti-bacterial

The shoe satisfies the requirement according to the norm

IEC 61340-4-3:2001 for the electrical resistance **ESD class 3 (electric dissipative footwear)**

Size 39-47 Shoe weight Sz 42 gr. 570




CERTIFICATIONS



TECHNOLOGIES AND MATERIALS



SECTORS

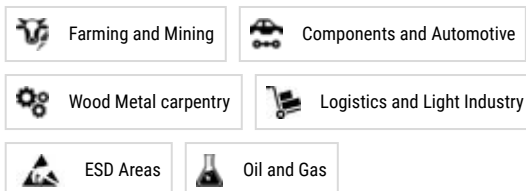

SOLE



In order to avoid the high number of accidents caused by slipping danger, Giasco realized an **excellent anti-slipping product**.

This sole is called **Kube**, a young and sporty styled shoe equipped with a special gripping compound and specific cubic dowels with inverted profile in the outsole.

With thanks to these special characteristics Kube obtained the maximum certification against slipping: **jobs on inclined roofs** (UNI 11583:2015).

PLUS



The Zero Abrasion technology is an anti-scratch leather, finished with a polyurethane multi-layer, that assures a complete protection of the upper against usury and abrasion. Highly resistant to water and oils, this leather is suitable for people who like wearing always clean and nice shoes even after months of usage.



Stability Support is the Giasco technology the guarantees the maximum heel support during walking.

Inside it there's a particular structure that localizes the support only on specific areas, in order to avoid an excessive stress of the foot.

It helps the correct walking and a better discharge of the weight along all the foot, with advantaged for back and joints.

ANTISLIPPING TEST RESULTS



SRC
ANTI-SLIPPING SOLE

VERY GOOD

SRA
ceramic +
NaLS

HEEL \geq 0,28
FLAT \geq 0,32

0,46
0,43

SRB
steel +
glycerol

HEEL \geq 0,13
FLAT \geq 0,18

0,30
0,29