



KUBE

## BASKET S3

KU037N

CE UNI EN ISO 20345:2012 S3 SRC ESD CLASS 3

High shoe, Nubuck IDROTECH® WRU grain leather thickness 1,8-2,0 mm.

Perspiring and resistant to abrasion fabric lining.

Shoe with refracting fabric insert.

Soft, lined and padded tongue.

**COMPLETELY METAL FREE SHOE**

The shoe satisfies the requirements of slipping resistance on inclined roofs according to **UNI 11583:2015**

**TOECAP 200J** polymeric composite non-thermic according to EN 12568

**MIDSOLE flexible antiperforation composite fabric** according to EN 12568

**SOLE KUBE** bidensity polyurethane antistatic, resistant to hydrolysis ISO 5423:92,

to hydrocarbons and to abrasion, anti-shock and anti-slipping **SRC**


**INSOLE 5000, three-materials extracomfort:** perspiring, removable, anatomic, absorbing, ESD and anti-bacterial

The shoe satisfies the requirement according to the norm IEC 61340-4-3:2001 for the electrical resistance

**ESD class 3 (electric dissipative footwear)**

**Size 36-47 Shoe weight Sz 42 gr. 570**


### CERTIFICATIONS



### TECHNOLOGIES AND MATERIALS



### SECTORS

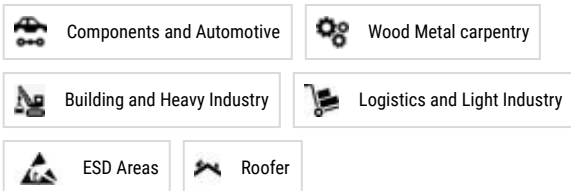

### SOLE




In order to avoid the high number of accidents caused by slipping danger, Giasco realized an **excellent anti-slipping product**.

This sole is called **Kube**, a young and sporty styled shoe equipped with a special gripping compound and specific cubic dowels with inverted profile in the outsole.

With thanks to these special characteristics Kube obtained the maximum certification against slipping: **jobs on inclined roofs** (UNI 11583:2015).

### PLUS



IDROTECH® is a leather treatment with the aim to optimize the water resistance and the foot perspiration.

This particular tanning method, thanks to the used mineral salts, gives an excellent softness and a complete mechanical resistance to oils and hydrocarbons.

The IDROTECH® leather is certified according to the norms ISO 4045, ISO 17075 and ISO 5403.

## ANTISLIPPING TEST RESULTS

---



**SRC**  
ANTI-SLIPPING SOLE

VERY GOOD

**SRA**  
ceramic +  
NaLS

HEEL  $\geq$  0,28  
FLAT  $\geq$  0,32

**0,46**  
**0,43**

**SRB**  
steel +  
glycerol

HEEL  $\geq$  0,13  
FLAT  $\geq$  0,18

**0,30**  
**0,29**